

EconoDot®



# EconoDot®

The **EconoDot** combines simplicity with affordability in a bench-top dispenser from Glue Dots International. Designed for both short and long-term projects, in occasional or continuous use environments, the EconoDot makes adhesive application quick, easy and cost effective.

## Designed for ease-of-use

- Fast, easy start up and operation
- Simply press product to nose plate, remove and Glue Dots automatically advance
- Dispenses a single Glue Dots pattern with no waste, no mess and no excess glue
- Pattern counter allows operators to track adhesive use

## Versatile tool


- Dispenses most Glue Dots adhesives, including Glue Lines™
- Lightweight design and small footprint allows the EconoDot to be quickly and easily moved from work station to work station
- Repositionable (front to back) Application Pad Sensor
- Holds a roll of up to 8,000 Glue Dots™

## Outstanding value

- Speeds up printing, production and packaging processes
- Pays for itself quickly in speed and increased productivity
- Virtually maintenance free
- Ideal for project-oriented environments like contract packaging facilities, sheltered workshops or fulfillment houses

The easy-to-use **EconoDot** works for a variety of jobs in a wide range of industries:

- Packaging
- Printing, Direct Mail and Fulfillment
- Manufacturing and Assembly
- Gift Basket Assembly

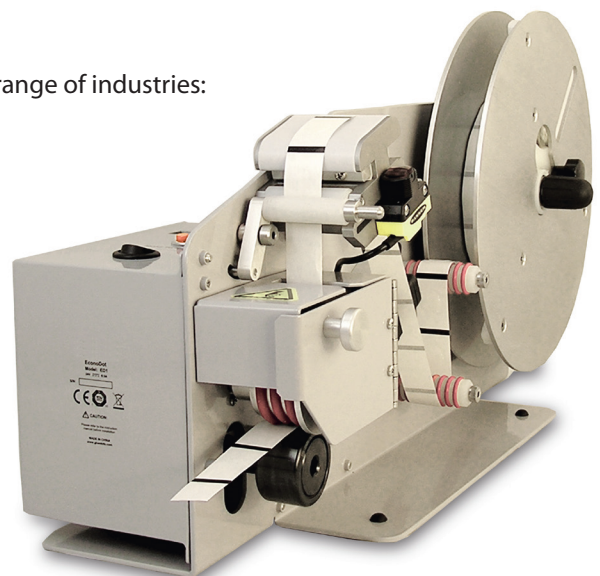

For more information about the EconoDot, visit [www.gluedotseurope.com/econodot](http://www.gluedotseurope.com/econodot)

## Specifications

Materials:	Steel, Aluminium
Height:	267mm
Length:	470mm
Depth:	178mm
Weight:	4500 grams
Noise:	45db
Power:	100-240VAC 50-60Hz 0.5A 24VDC
Cycles:	1 adhesive pattern per second
Capacity:	Maximum 8,000-count Glue Dots roll; Maximum 9" roll diameter
Temp:	Min 50 F; Max 122 F

## Standard EconoDot Rolls

Profile:	Low, High, High Shear, and Super High
Diameter:	9mm, 12mm
Tack Level:	Low, Medium, High, High Shear and Super High
Count:	Up to an 8,000-count roll on registered liner


Glue Dots are sold through qualified distributors of Glue Dots International.

## The Right Glue Dots™ for the Job

Glue Dots are available in four standard adhesive levels and three profiles.

### Standard Tack Levels

Standard Glue Dots are available in five standard tack levels (strength):

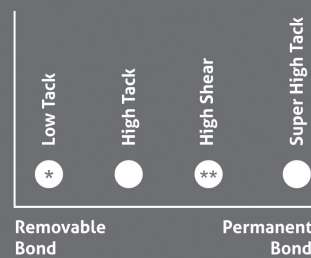

Glue Dots recommends adequate testing to ensure proper bond and release properties. Glue Dots will assist you throughout the testing process and will provide product samples to ensure performance.

\*Contains oil, test absorbent surfaces for staining. \*\*High Tack bond with vertical hold capabilities.

Low is considered removable. Depending upon the substrates used, High may be removable or permanent. In most cases Super High creates a permanent bond and will tear paper.

Because the strength of the bond is substrate dependent, adequate testing should be conducted to determine the proper tack level for the application. Product Samples are available throughout the testing process.

### Standard Profiles

Standard Glue Dots are available in three standard profiles (thicknesses):



Low Profile Glue Dots are thin and used to bond level items. Medium and High Profiles are used to create or bridge gaps between substrates.



For more information about the MatrX adhesives, visit [www.gluedotseurope.com/econodot](http://www.gluedotseurope.com/econodot) or call +44 (0) 1355 577222

Glue Dots™ and EconoDot® are trademarks of Glue Dots International LLC, New Berlin, WI, an Ellsworth Adhesives Company.  
U.S. Patent No's 5,935,670; 6,319,442; 6,640,864; 6,686,016; 8,006,734. Other U.S. and Foreign Patents Pending. ©2012 Glue Dots International.