

Dot Shot™ Pro



Dot Shot™ Pro

The Dot Shot Pro is so versatile and easy to use, it replaces other handheld adhesive applicators. Rugged, lightweight and portable, it goes anywhere to dispense the right amount of Glue Dots™ adhesives.

Easy to use

- Simply roll the nose over any surface
- Cleanly applies as few or as many adhesive patterns as needed
- Easy, fast loading
- Internal winding of used liner
- Glue Dots rolls are color-coded by tack level

Safe to use

- Ergonomic, triggerless design
- No sharp edges
- No cords or electricity
- Safe alternative to hot glue guns

Productivity

The versatile **Dot Shot Pro** works for a variety of jobs in a wide range of industries:

- Packaging
- Material Handling
- Printing, Direct Mail and Fulfillment
- Gift Basket Assembly




For more information about the Dot Shot Pro, visit www.gluedotseurope.com/DSP

Dot Shot™ Pro


Specifications

Weight:	454 grams
Height:	260mm
Length:	235mm
Materials:	Polycarbonate Plastic, Nylon, Silicon Rubber, Aluminium

Dot Pattern: 12mm diameter Glue Dots™ spaced 30mm on centre

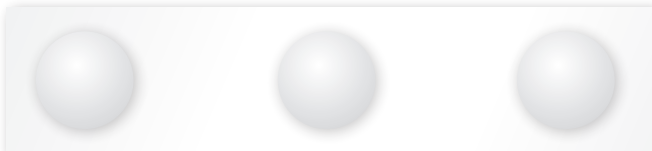

Stitch Pattern: 6mm diameter Glue Dots™ spaced 11mm on centre

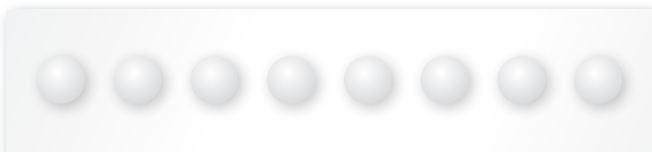

Standard Dot Shot™ Pro rolls*

Profile:	Low, Medium and High
Diameter:	12mm, 6mm stitch pattern
Tack Level:	Low, High, High Shear and Super High
Count:	Up to 1,500-count rolls on registered liner. 4000-count Stitch Pattern rolls


***MatrX™ adhesives are also compatible with the Dot Shot Pro. Please see the separate MatrX sell sheet.**

The Right Glue Dots™ for the Job

Glue Dots are available in four standard adhesive levels and three profiles.

Standard Tack Levels

Standard Glue Dots are available in five standard tack levels (strength):

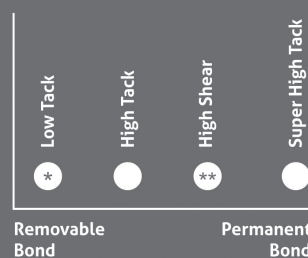

Glue Dots recommends adequate testing to ensure proper bond and release properties. Glue Dots will assist you throughout the testing process and will provide product samples to ensure performance.

*Contains oil, test absorbent surfaces for staining. **High Tack bond with vertical hold capabilities.

Low is considered removable. Depending upon the substrates used, High may be removable or permanent. In most cases Super High creates a permanent bond and will tear paper.

Because the strength of the bond is substrate dependent, adequate testing should be conducted to determine the proper tack level for the application. Product Samples are available throughout the testing process.

Standard Profiles

Standard Glue Dots are available in three standard profiles (thicknesses):



Low Profile Glue Dots are thin and used to bond level items. Medium and High Profiles are used to create or bridge gaps between substrates.



For more information about the MatrX adhesives, visit www.gluedotseurope.com/DSP or call +44 (0) 1355 577222

Glue Dots™ and Dot Shot™ Pro are trademarks of Glue Dots International LLC, New Berlin, WI, an Ellsworth Adhesives Company.
U.S. Patent No's 5,935,670; 6,319,442; 6,640,864; 6,686,016; 8,006,734. Other U.S. and Foreign Patents Pending. ©2012 Glue Dots International.